
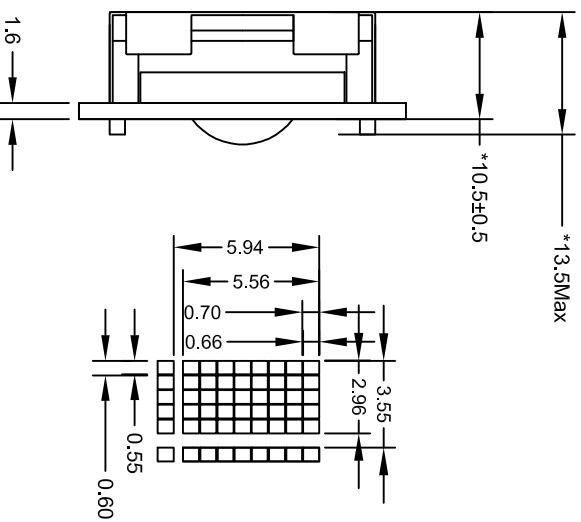


Customer approval :

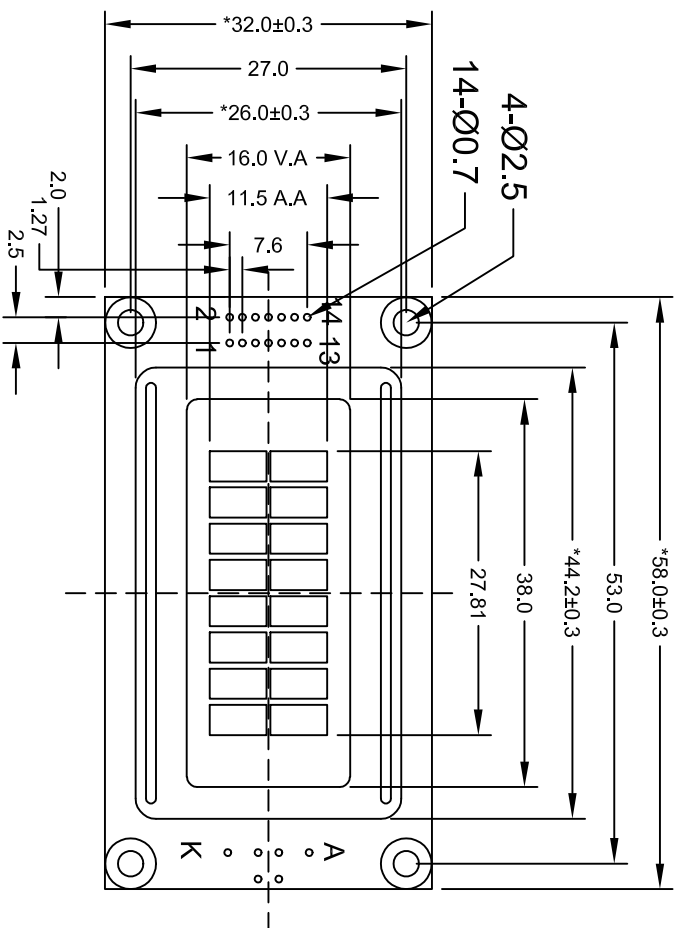

**SPECIFICATION:**

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:3.3V, Vlcd:3.2V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/ Transmissive/Blue
- 4). Operating temp.: 0°C~+50°C
- 5). Storage temp.: -10°C~+60°C
- 6). Control IC: SPLC780D1 (Or Compatible)
- 7). BACKLIGHT: Edge White
- 8). DIMENSIONS WITH MARK "mm" ARE IMPORTANT WITH MARK "(μ)" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

**TCC** 深圳市三元晶科技有限公司  
ShenZhen TCCLCD HI-Tech Co., Ltd.

REV	REVISION RECORD	DATE	MODEL NO.	GENERAL TOL:
A	FIRST ISSUE	2010/09/29	模组型号	± 0.3
B			APPROVED BY 审核	PAGE: 未注公差
C			Francis	OF 1
D			Liu	UNIT: 单位mm
			2010/09/29	PROJECTION 三角法
			2010/09/29	