Customer approval :

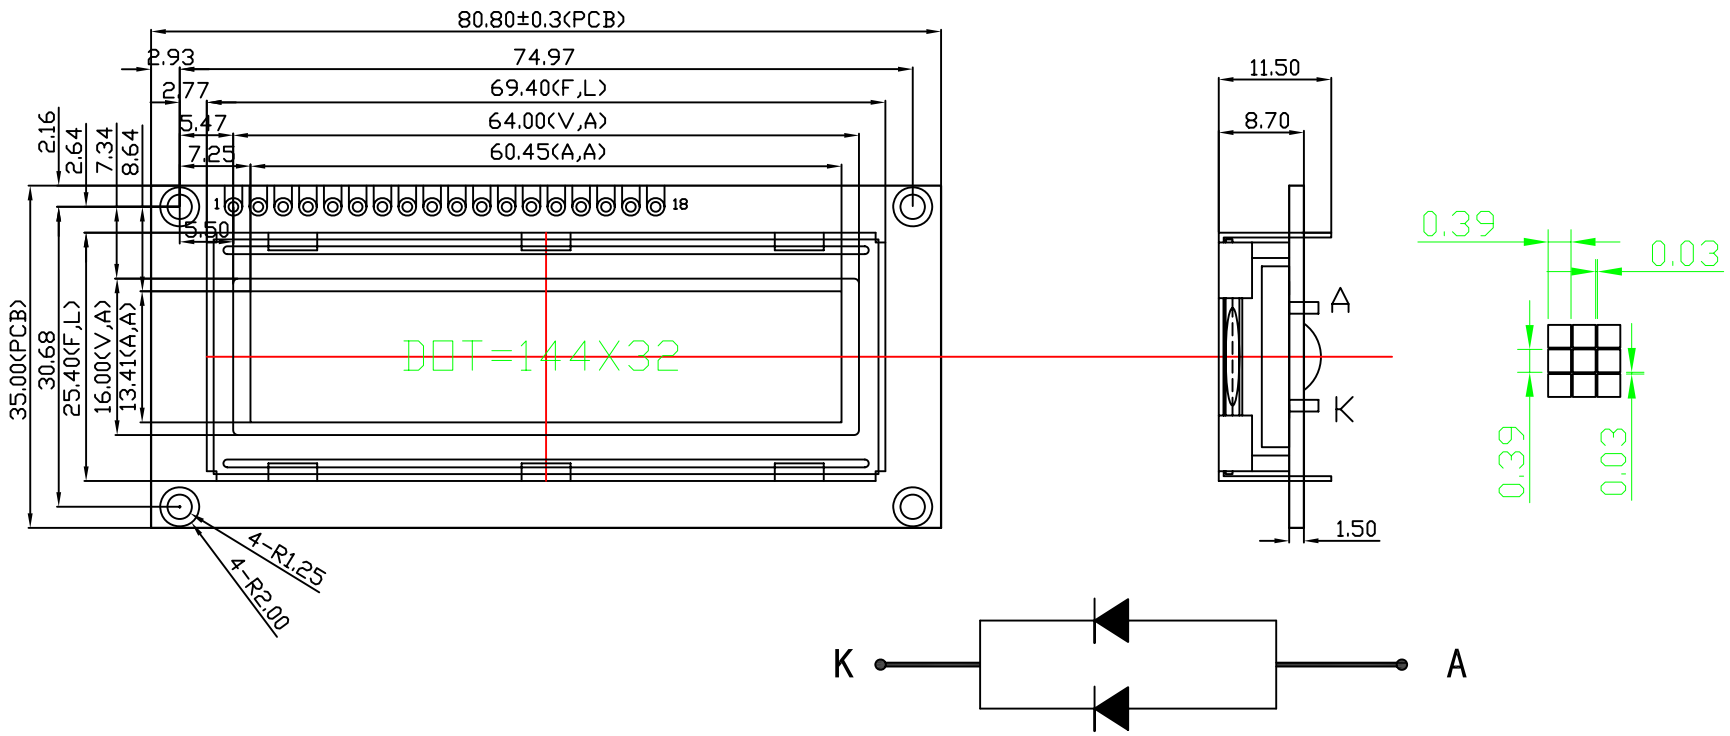

Specification:

1). Driving: Duty:1/32, Bias:1/6, VLCD:5.8V(Ref), VDD:5V
2). Viewing Direction: 6 O'clock
3). Display mode:STN/Y-G/POSITIVE
4). Operating temp.: -20°C~70°C
Storage temp.: -30°C~80°C
5). Controller IC: ST7920 , COB
6). Backlight: Bottom ,White
7). Dimensions with mark "*" are important, with mark "()" are referenced
8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7 ~ 14	15	16	17	18
CONNECTION	VSS	VDD	NC	RS/CS	RW/SID	E/SCLK	DB0 ~ DB7	BLA	NC	PSB	/RST

REV	REVISION RECORD	DATE
A0	First issue	12/10

TCC® 深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co,. Ltd

MODEL NO.	SYB14432BZKV10	GENERAL TOL: ± 0.3
APPROVED BY / CHECKED BY / DRAWING BY		PAGE? / UNIT: mm
		PROJECTION