




Customer approval :

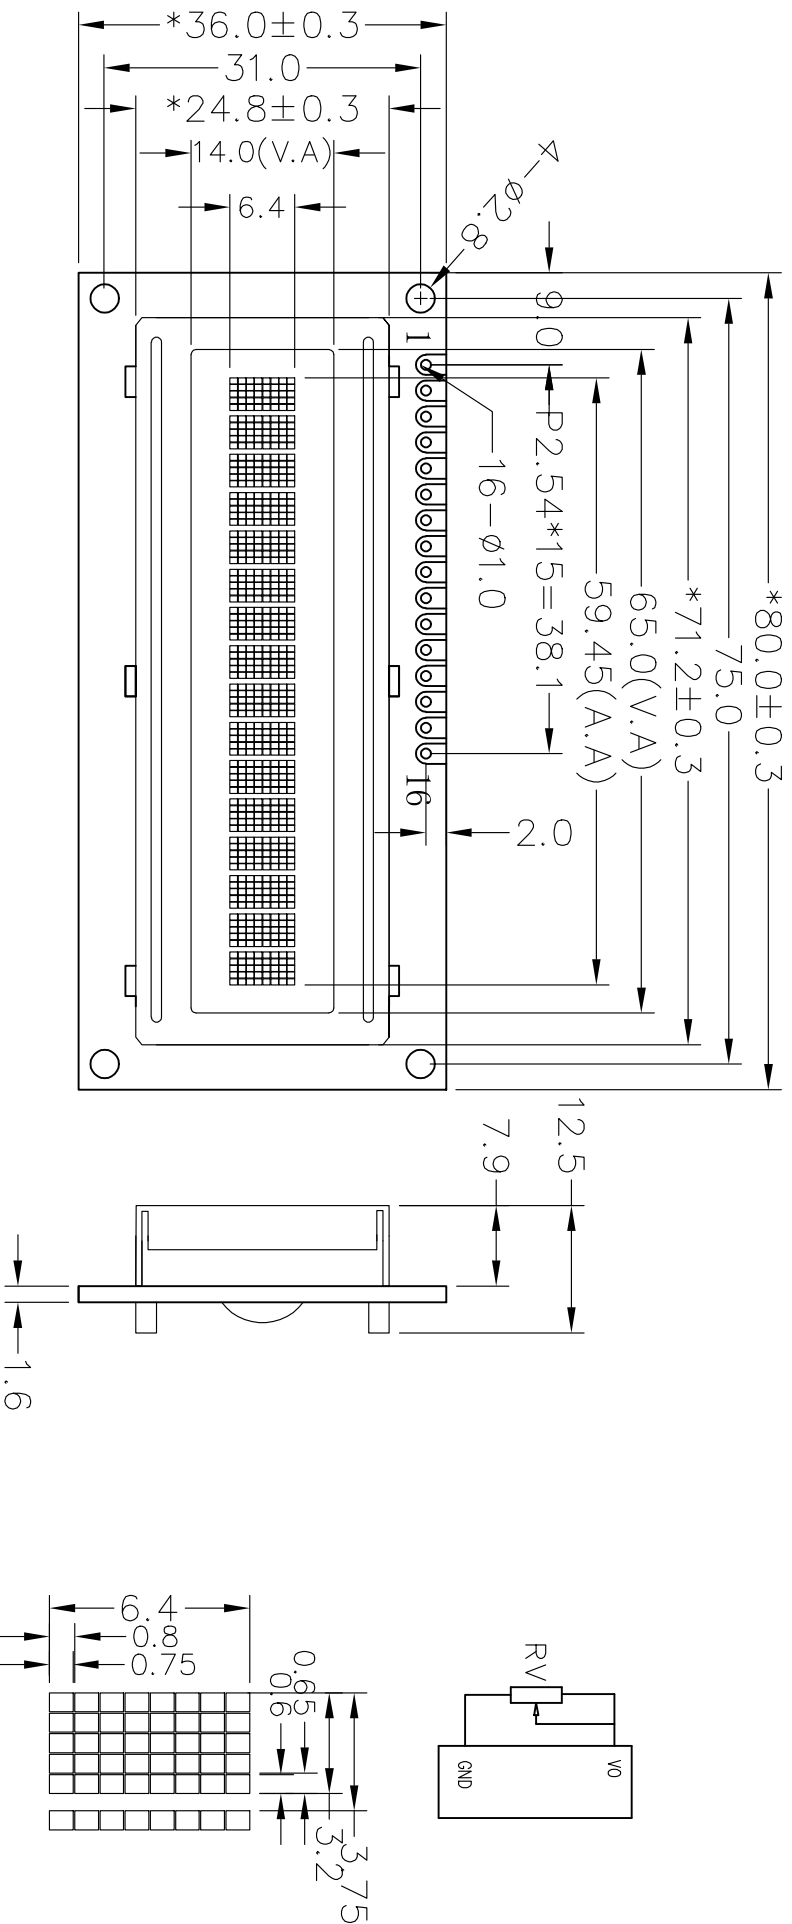

**SPECIFICATION:**

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.15V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/**Negative**/Transmissive/Blue
- 4). Operating temp.:  $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- 5). Storage temp.:  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- 6). Control IC: SPLC780D1(Or Compatible)
- 7). BACKLIGHT: Without
- 8). DIMENSIONS WITH MARK "\*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V <sub>O</sub>	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REVISION RECORD		REV	 <b>深圳市三元晶科技有限公司</b> Shenzhen TCC LCD Hi-Tech Co., Ltd													
First issue		A0	DRAWING NO.	SYB1601A2V11-5C10BL-BSNG									GENERAL TOL:	± 0.2		
			APPROVED BY	CHECKED BY	DRAWING BY		UNIT:	mm	PAGE							
					YJQ				2010/9			1/1				