
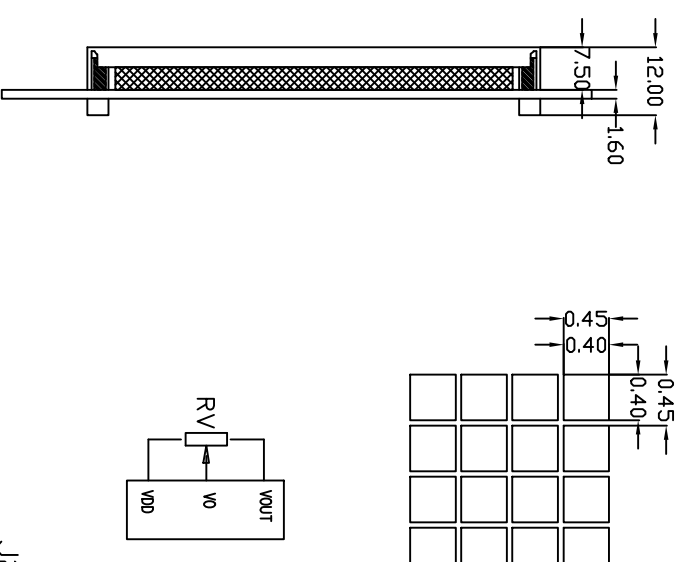


Customer approval :

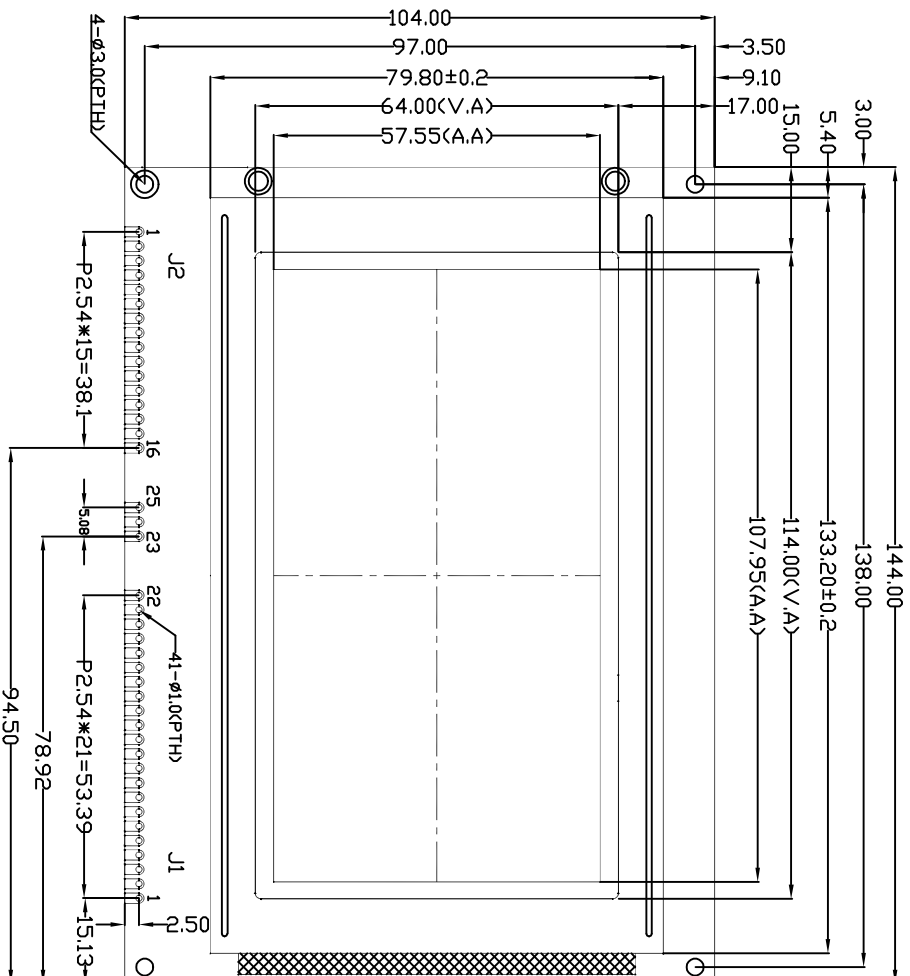

J1:


J2:

1	~	16
KEY1 ~ KEY16		

1	2	3	4	5	6	7	8	9	10
FG	VSS	VDD	V0	/WR	/RD	/CS	C/DBUSY	/RST	
11	~	18	19	20	21	22	23	24	25
DB0	~	DB7	NC	YOUT	BLA	BLK	BLA	NC	BLK

SPECIFICATION:

- 1). Driving: Duty:1/128, Bias:1/12, Vdd:5.0V, Vlcd/V0:18V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/BLUE
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Control IC: RA8822P1N-S(Or Compatible)
- 7). BACKLIGHT: White LED 5V Edge,LED Whiteled
- 8). DIMENSIONS WITH MARK "\*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

REVISION RECORD		REV	
First issue		V8.0	
		深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd	
DRAWING NO.	SYB240128AZ(V80-5C8BLN7R8-B5N1)	DRAWING BY	Luoxian
APPROVED BY	CHECKED BY	UNIT:	mm
		PAGE	1/1