


Customer approval :

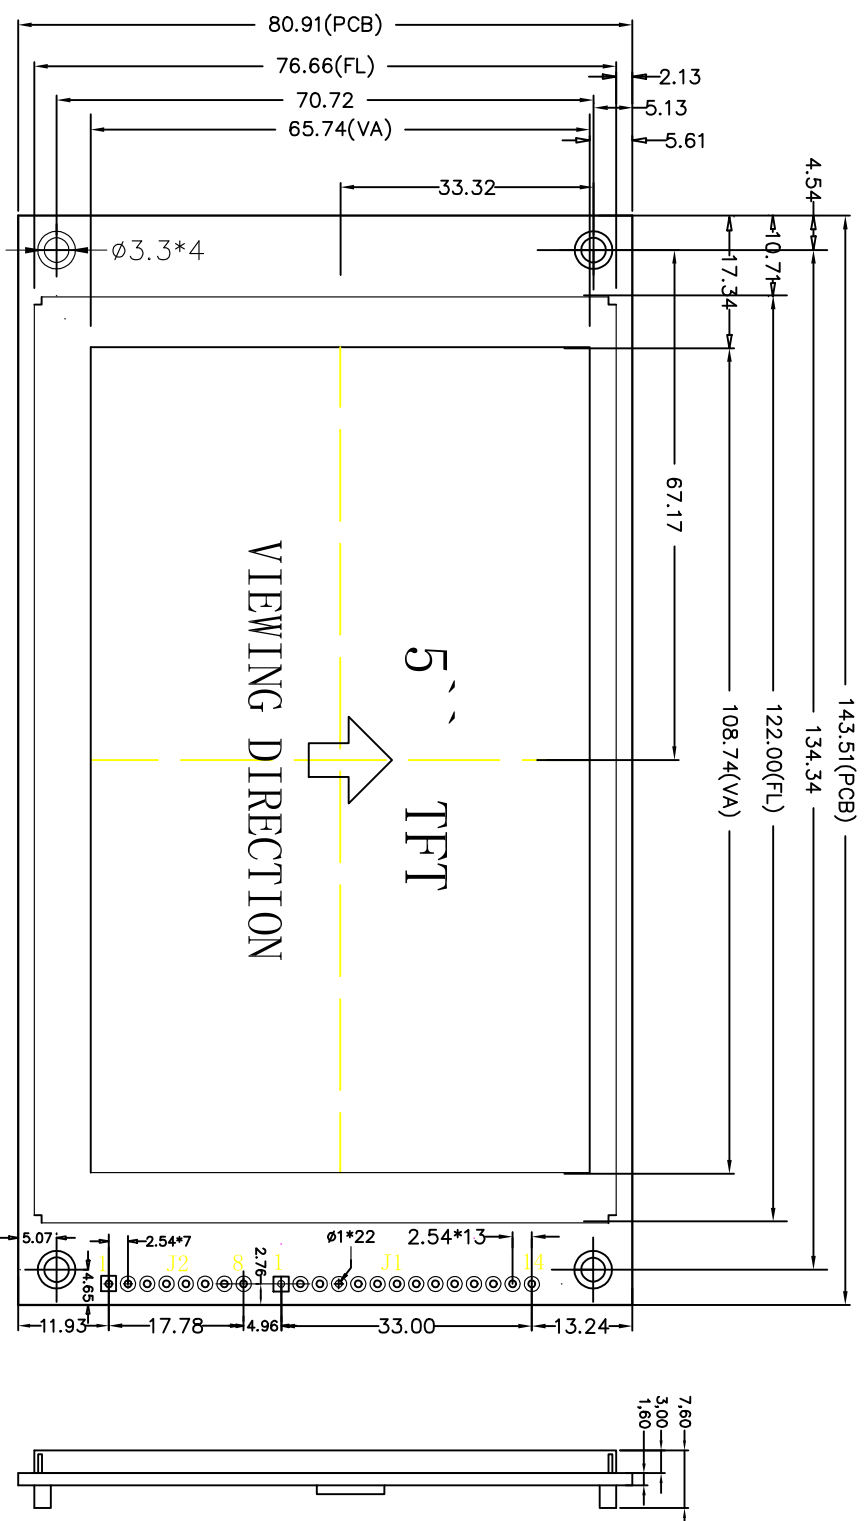

NO.	SYMBOL
1	GND
2	VCC
3	SCS#
4	SCLK
5	SD
6	SD1
7	RST
8	INT
9	DISP OFF
10	RTP-CLK
11	RTP-CS
12	RTP-DIN
13	RTP-DOU
14	RTP-IRQ

J2(FLASH)

PIN	1	2	3	4	5	6	7	8
CONNECTION	SFCS0	SFCS1	SFD1	SFD0	SFCLK	VCC	GND	RST

Specification:

- 1). Driving:VDD:3.3V 80mA
- 2). Viewing direction: 6 o'clock
- 3). Display mode: TFT 800(RGB)\*480
- 3). Operating temp.: -10°C~+60°C
- 4). Storage temp.: -20°C~+70°C
- 5). Control IC: TC76680
- 6). BACKLIGHT :VBL:3.3V IBL:130mA 500cd/m<sup>2</sup>
- 7). All the raw materials are RoHS compliant
- 8). Interface:SPI

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:
A	FIRST ISSUE	2018/08/13	模组型号	审核	LXG	未注公差
B					LXX	± 0.25
C						
D						



深圳市三元晶科技有限公司  
Shenzhen TCCLCD Hi-Tech Co., Ltd.

PAGE: 1 OF 1  
PROJECTION 三角法  
UNIT: 单位 mm