
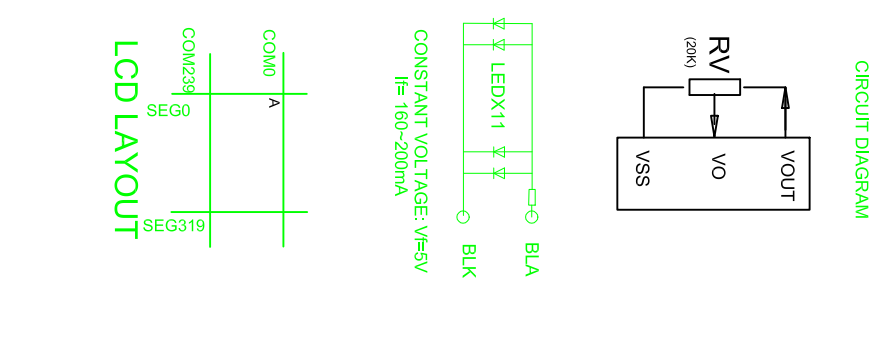



# Choose to use J1~4, FPC, TP. 选择使用

Customer approval :

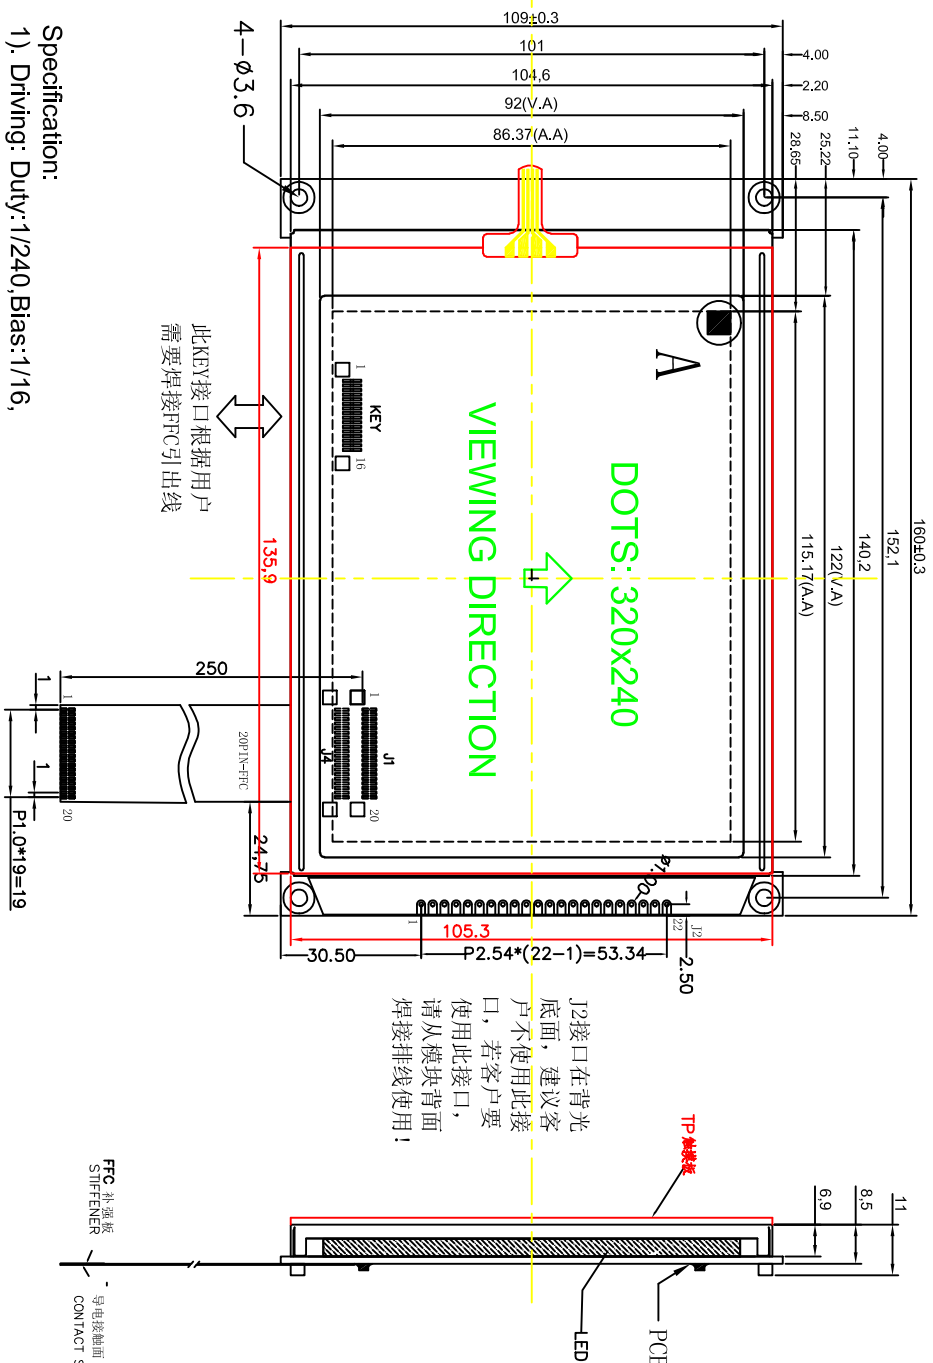

### Specification:

- 1). Driving: Duty:1/240, Bias:1/16, Vout:-21.5V, V0:-18.5V, VDD:5.0V.
- 2). Viewing direction: 6 o'clock
- 3). Display mode:STN/Blue/Negative/Transmissive
- 4). Operating temp:-20°C~+70°C
- 5). Storage temp: -30°C~+80°C
- 6). Control IC: RA8806-S (Or Compatible)
- 7). Backlight: Edge White LED: 5.0V 160MA
- 8). dimensions with mark "\*" are important with mark "(")" are referenced
- 9). All the raw materials are RoHS compliant



CONNECTION	1	2	3	4	5	6	7	8	9~16	17	18	19	20
J1	VSS	VDD	VO	/MR	/RD	/CS	RS	/RST	DB0~DB7	BUSY	VO	BLA	BLK
J2	VSS	VDD	VO	RS	/RD	/MR	DB0~DB7	/CS	/RST	BUSY	INT	BLA	

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:
A	FIRST ISSUE	2015/11/03	320240BZKM33-3-5C6BLN1R6-B5WI	审核	绘图	± 0.25
B				检查		
C				审核	Luoxian	

深圳市三元晶科技有限公司  
ShenZhen TCCLCD HI-Tech Co., Ltd.

www.lcmlcd.com

2015/11/03

Francis

2015/11/03

Luoxian

2015/11/03

三角法